
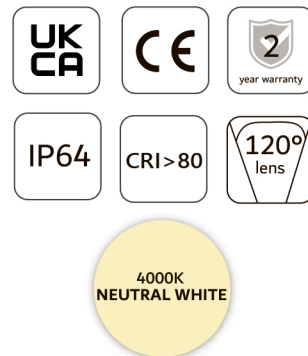


HQS-12W-60LED-NW-WP-12V


Professional Led Strip, 12 W/m

SUPER STROPY

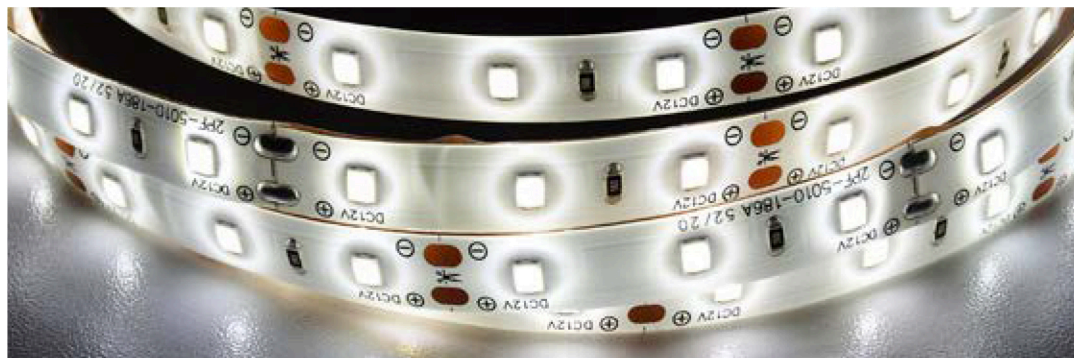


TECHNICAL DETAILS

SUPPLY VOLTAGE	12 V ± 0.5 VDC
POWER	12 W/m
CURRENT	1 A/m
POWER PER REEL (5M)	60 W
COLOR TEMPERATURE	4000K
BEAM ANGLE	120°
LUMINOUS FLUX PER METER	1180 lm
CRI	80
MAXIMUM LENGTH FOR ONE SIDED SUPPLY	5 m
IP PROTECTION DEGREE	IP64
WORKING TEMPERATURE	-25°C ~ 50°C
STORAGE TEMPERATURE	-25°C ~ 60°C
LED QTY (PER METER)	60 LEDs/m
WIDTH PCB	10 mm
CUT SECTION	50 mm
CONNECTION WIRE	2 x AWG20 (0.52 mm ²) stranded wire, length = 140 mm: V+: red: V:-black
DIMENSIONS (L * W * H)	5000 x 10 x 1.2 mm
PACKING	5 m / roll (bag); 50 pcs / ctn; ctn dimensions: 45 x 25 x 25.6 cm

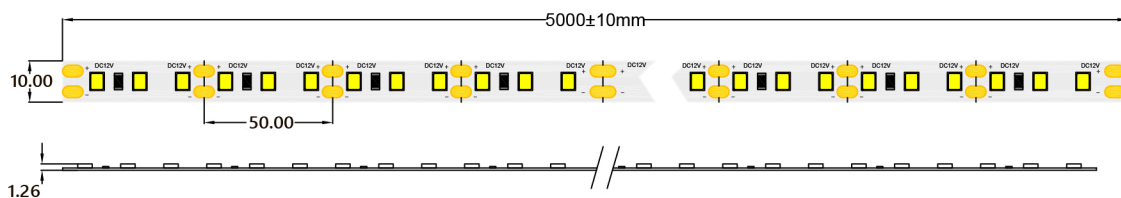


CONNECTORS PCB Width 10 mm

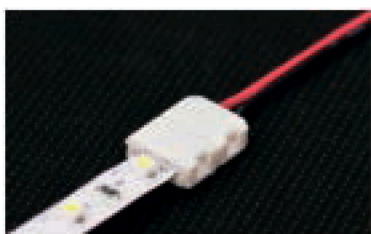

CLICK-10A-WP



CLICK-10B-WP



CLICK-10C-WP



MW LIGHTING
HQS-12W-60LED-NW-WP-12V



6
kWh/1000h

